

PRESIDENT

JIMMY III

AM / FM

12 V

SIMPLY EASY



Art. N° TXPR046



3 143599 110315 2



Complementary product


CV 24/12V 3A

- Input : 24VDC
- Output : 12VDC 3Amax.
- Dimensions : 42 x 42 x 21 mm
- Weight : 68 g

Réf. ACMA113



3 143599 410321 0

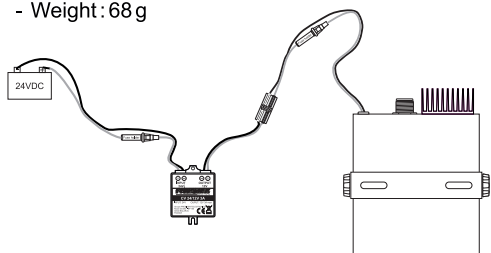

FEATURES

- LED display
 - 2 Emergency channels (EMG)
 - Scan
 - Vox (Hands-free function)
 - TOT
 - ...
- Supplied accessories:
 - 1 Electret microphone
 - 1 Support
 - 1 Mounting cradle
 - Screws and fused power cord

*See warranty conditions on our website

Groupe PRESIDENT ELECTRONICS 2255/03-24 - C0498

PRESIDENT ELECTRONICS
— since 1978

S.A. Capital 10.000.000 €
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : <http://www.president-electronics.com>
e-mail : groupe@president-electronics.com




Compatible
REMOTE BT MIKE
REMOTE MIKE

ASC Automatic
Squelch
Control

VOX built in

JIMMY III

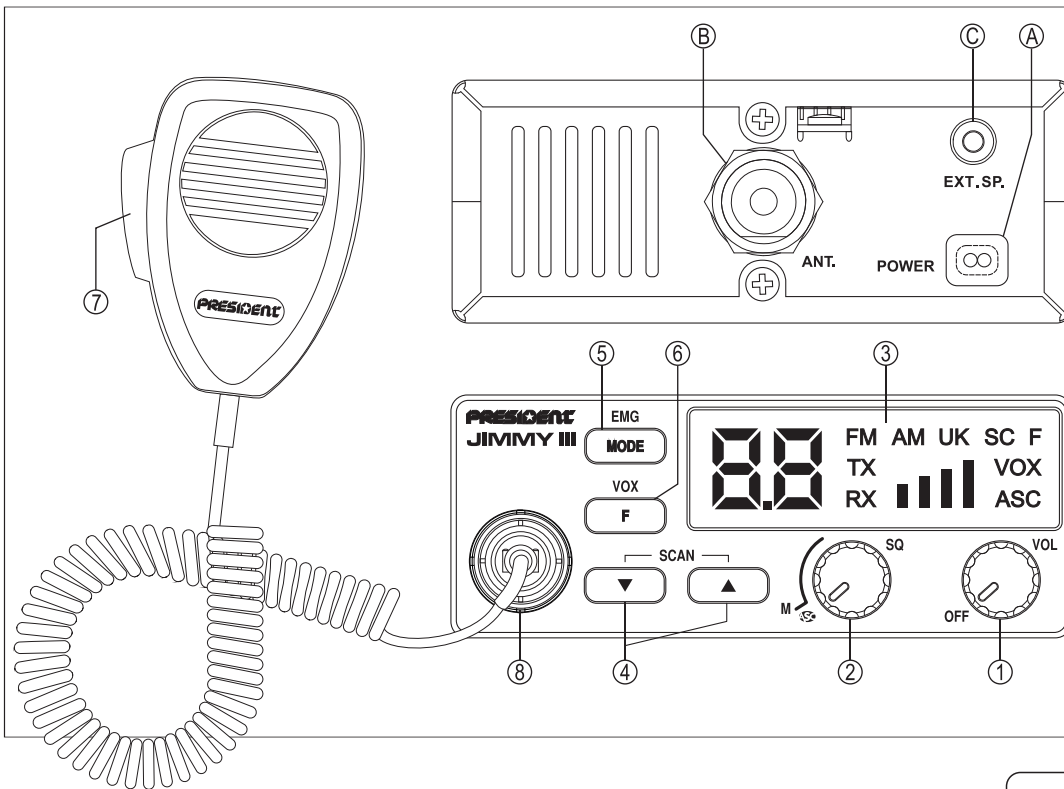

Functions

- 1) ON/OFF ~ VOLUME
- 2) ASC (Automatic Squelch Control) ~ SQUELCH
- 3) DISPLAY
- 4) CHANNEL SELECTOR ~ SCAN
- 5) MODE ~ EMG
- 6) FREQUENCY BAND SELECTION ~ VOX ~ VOX SET
- 7) PTT (Push To Talk)
- 8) 6 PIN MICROPHONE PLUG

- A) DC-POWER TERMINAL (13,2 V)
 B) ANTENNA CONNECTOR (SO-239)
 C) JACK FOR EXTERNAL OPTIONAL SPEAKER (8 Ω, Ø 3.5 mm)

Specifications

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 MHz to 27.405 Mhz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (mm) : 115 (W) x 130 (D) x 45 (H)
- Weight : 0.560 kg
- Supplied accessories : Electret microphone with support, mounting cradle, screws and fused power cord.

2) TRANSMISSION


- Frequency allowance : ± 300 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 µW
- Microphone sensitivity : 3.0 mV
- Max. drain : < 2A (13.2 V)
- Modul. signal distortion : 2 %

3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5 µV - 113 dBm (AM)
0.35 µV - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 3 W
- Squelch sensitivity : min. 0.2 µV - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Max. drain : 180 ~ 500 mA



All European standards

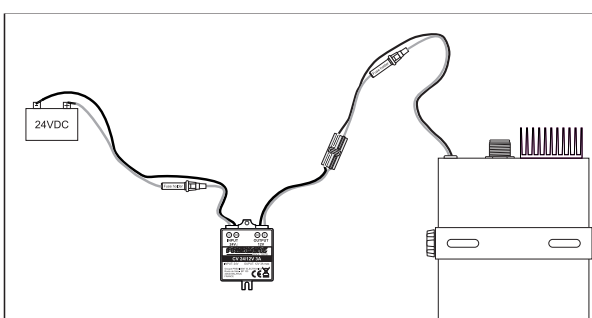

Complementary product

CV 24/12V 3A

- Input : 24VDC
- Output : 12V DC 3A max.
- Dimensions : 42 x 42 x 21 mm
- Weight : 68 g

Réf. ACMA113



3 14 35 994 1 03 21 0