

PRESIDENT

LINCOLN II +

Even more temperament...

2+3* years
warranty

Group
PRESIDENT
ELECTRONICS

Multi-color LCD



- + Powerful: 35 W FM / LSB / USB / CW and 12 W AM / CW
- + Wide: frequency band of 10 m + 12 m
- + Customizable (by software)
 - AM / FM / USB / LSB / CW / DIN format
 - VFO – Continuous frequency variation (push/pull)
 - Sophisticated menu: overvoltage protection...
 - 6 memories and many features to discover...

Groupe

PRESIDENT
ELECTRONICS

since 1978

S.A. Capital 10.000.000 €

Siège Social / Head Office – France – Route de Sète – BP 100
34540 BALARUC

Site Internet : <http://www.president-electronics.com>

e-mail : groupe@president-electronics.com


2034/06-19 - C0415



See warranty conditions on our website: www.president-electronics.com



- MENUS**
- Roger Beep frequency *rbEEPfr*
 - Roger Beep time *rbEEPt*
 - CW frequency *CJUtOfr*
 - CALL frequency *CALL fr*
 - Monitor gain volume *NontrNo*
 - Tot (time Out Timer) *tot*
 - SWR protection *tSr*
 - SWR setting protection *SJUrH!*
 - Voltage protection *bAtPr-ot*
 - Voltage protection high *SEtdCH*
 - Voltage protection low *SEtdLo*
 - Scan type *SCANtYP*
 - Backlight color *Color*
 - Backlight brightness *br, 9Ht*
 - ▲▼ key setting *UP dn*
 - DW setting *dJUb*
 - Priority channel 1 setting *EP79 !*
 - Priority channel 2 setting *EP792*
 - CTCSS/DCS setting *CdESEt*
 - Reset *rESEt*

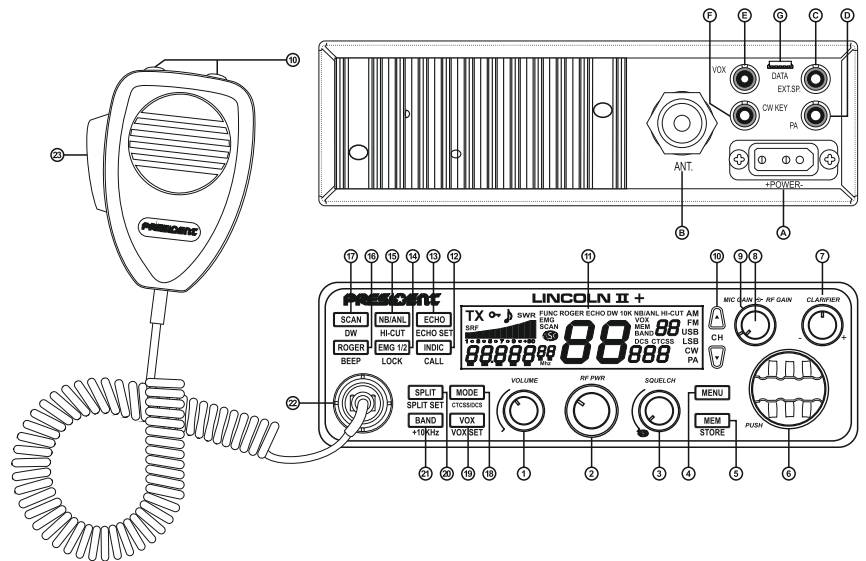

- ON/OFF ~ VOLUME
- RF POWER
- ASC (Automatic Squelch Control) ~ SQUELCH
- MENU
- MEM ~ STORE
- ROTARY "PUSH" KNOB
- CLARIFIER
- MIC GAIN
- RF GAIN
- ▲/▼ CHANNEL/FREQUENCY SELECTOR
- LCD
- INDIC ~ CALL
- ECHO ~ ECHO SET
- EMG 1/2 ~ LOCK
- NB/ANL ~ HI-CUT
- ROGER ~ BEEP

- SCAN ~ DW
- MODE ~ CTCSS/DCS
- VOX ~ VOX SET
- SPLIT ~ SPLIT SET
- BAND ~ +10KHz
- 6 PIN MICROPHONE PLUG
- PTT
- A) DC-POWER TERMINAL (13,8 V)
- B) ANTENNA CONNECTOR (SO-239)
- C) EXTERNAL SPEAKER JACK (8 Ω, Ø 3,5 mm)
- D) JACK FOR OPTIONAL PA (Public Address) (Ø 3.5 mm)
- E) JACK FOR OPTIONAL VOX MIKE (Ø 2.5 mm)
- F) JACK FOR CW DEVICE (Ø 3.5 mm)
- G) USB DATA (PC setting in option)

2035/06-19 - C0415b

1) GENERAL

- Modulation modes : AM / FM / USB / LSB / CW
- Frequency ranges : from 28.000 MHz to 29.700 MHz
: from 24.890 MHz to 24.990 MHz
- Antenna impedance : 50 ohms
- Power supply : 13,8 V
- Dimensions (in mm) : 170 (W) x 250 (D) x 52 (H)
- Weight : 1,4 kg
- Accessories supplied : microphone UP/DOWN with support, mounting cradle, screws and fused, power cord.

2) TRANSMISSION

- Frequency allowance : +/- 300 Hz
- Carrier power : 12 W AM / 35 W FM / 35 W USB-LSB (PEP) / 12 W CW
- Transmis. interference : inferior to - 50 dBc
- Audio response : 300 Hz to 3 KHz in AM/FM/USB/LSB
- Emitted power in the adjacent channel : inferior to 20 μW
- Microphone sensitivity : 3.0 mV
- Drain : 6 A (with modulation)
- Modulated signal distortion : 2 %

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.7 μV - 110 dBm (AM)
0.35 μV - 116 dBm (FM)
0.28 μV - 118 dBm (USB/LSB/CW)
- Frequency response : 300 Hz to 3 kHz in AM/FM/LSB/USB
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2 V - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 400 mA nominal / 600 mA maximum

Specifications

